


VEKA PERFECTLINE 70 AD

Windows based on Veka Perfectline 70 AD profiles are the ideal solution for customers who value quality and functionality while maintaining a lower price. Thanks to a wide range of glazing package options, it is possible to adapt the windows to the current needs of multi-family and institutional buildings. The 70 mm deep profile ensures favorable thermal and acoustic insulation, contributing to comfortable use and energy savings.

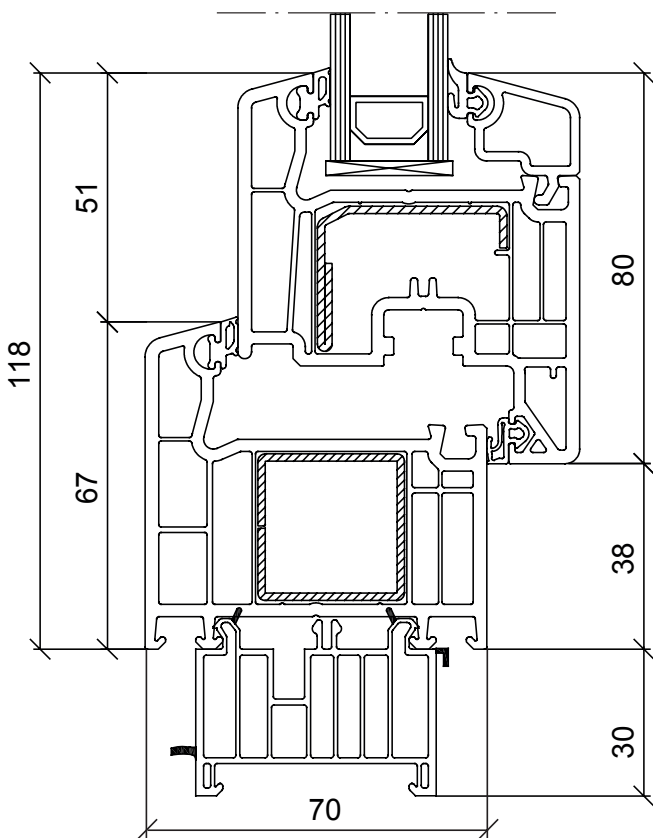

- | | | | |
|--|--|--|--|
| 1,22
U _w (W/m ² K) for a double-glazed unit with a warm edge spacer
U _g = 1.0 W/m ² K | 5/5
frame/sash | 2
gasket | 70
gasket depth installation (mm) |
| A
class | 4
air permeability class according to EN 12207 | 9A
water tightness class according to EN 12208 | C5
resistance to wind load according to EN 12210 |

BEST BASIC WINDOWS PVC EQUIPMENT

PREMIUM PROFILES

5-chamber window system in class A with double sealing

SASH LIFT

Facilitates the closing of large and heavy window sashes

THIN WELD

Provides the sash with an elegant look and aesthetics

MINIMUM 2 ANTI-BURGLARY LATCHES

At least two latches and anti-burglary rollers, effectively protecting against burglary attempts and increasing resistance to mechanical forces

GRADED TILT

Allows adjusting the ventilation intensity to atmospheric conditions

DUST SEAL

Protects the hardware rebate from collecting operational dirt

HANDLE POSITION BLOCK

Increases the comfort of using the window and prevents the sash from falling out of the upper hinge

INNOVATIVE HANDLE MECHANISM

Prevents manipulation of the window from the outside, enhancing room security

REINFORCED HINGES

Load capacity of standard hinges up to 130kg

REINFORCEMENT

Galvanized steel profiles with a thickness of 1.5 mm guarantee durability, while the sashes use reinforcements ranging from 1.5 to 2 mm, depending on the construction size, ensuring structural integrity

SWISSPACER WARM EDGE SPACER

Made of a material with a very low thermal conductivity coefficient. It improves the thermal insulation of the entire construction, reducing energy loss through the spacer. It also enhances the performance of glass packages by limiting condensation and increasing water vapor absorption, thus contributing to thermal comfort and energy savings

ENERGY-EFFICIENT DOUBLE GLAZING SYSTEM

Ug coefficient = 1.1 W/m²K

WINDOW SILL STRIP

It facilitates the installation of window sills and protects the frame from potential damage during transport

WINDOW TRANSPORT HANDLES

Make window and door transport easier on construction sites

